

## Oscar S0 Oturma Grubu

<b>Tasarım;</b>	
<b>Materials &amp; Finishes</b>	<p>a- Back and seat units are produced as separate structures.</p> <p>b- The back is produced in a single carcass in 20x20x1.2mm tubular steel that is also the base for the feet to be assembled. To upholster the sofa, solid wood strips are mounted around the frame where the fabric can be fixed. The frame is painted with an anti-corrosive agent to prevent rusting. To achieve a higher quality of upholstery workmanship, the outer sides of the frame is cladded with 3mm MDF.</p> <p>c- The seat is produced in a single carcass in 20x20x1.2mm and 30x20x1.5mm tubular steel that is also the base for the feet to be assembled. To upholster the sofa, solid wood strips are mounted around the frame where the fabric can be fixed. The frame is painted with an anti-corrosive agent to prevent rusting. To achieve a higher quality of upholstery workmanship, the outer sides of the frame is cladded with 3mm MDF.</p> <p>a- On the back 35 Density High Resilience foam and 3cm + 3cm 36d Soft foam and 3cm 32d Hyper foam is applied. On the sides 32D Gray Foam is applied, and on the rear surfaces 1cm 22D gray foam is applied. The inner cover is a 150gr fiber layer. The upholstery is fixed.</p> <p>b- To achieve the desired flexibility the frame is supported by 450E elastic belts on the seating area. On the seat 8cm 35 D40 HR foam and 6cm 36d Soft foam is padded with an extra of 150gr fiber for comfort. On the arms 2cm 32D HR foam and 3cm 32d Hyper foam is applied. The inner cover is a 150gr fiber layer. The upholstery is fixed.</p> <p>c- There is a wooden base under the seat units that is finished in smoked oak lacquer.</p> <p>d- The lower metal frame and the legs are in metal and painted in an epoxy coat finish.</p>
<b>Materials &amp; Finishes</b>	<p>a- Optional cushions are provided in sizes of 30x60 and 50x50cm.</p> <p>b- Inside the cushions is a Koleksiyon mix of fibre and goose feather for maximum comfort and durability.</p>
<b>Assembly;</b>	<p>a- Back and seat elements are assembled with Metric 6x65Screws, M6 bolts and washers.</p> <p>b- Wooden base is assembled to the carcass with M6x35mm screws.</p> <p>c- Lower metal frame is assembled with M6x50mm screws and M6x15mm screws.</p>

## Oscar S0 Oturma Grubu




OSCAR S0 105 PUF w:1050 d:963 h:415 mm





OSCAR S0 105 ARA KOLTUK w:1050 d:963 h:415mm



OSCAR S0 105 SOL KOLTUK w:1050 d:977 h:807 mm

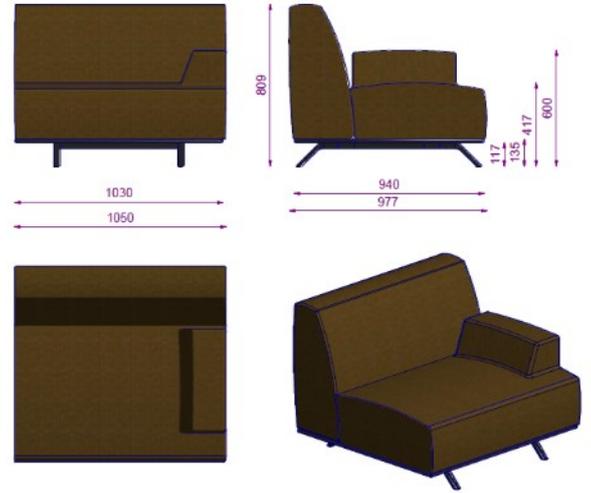


OSCAR S0 105 SAĞ KOLTUK w:1050 d:977 h:807mm

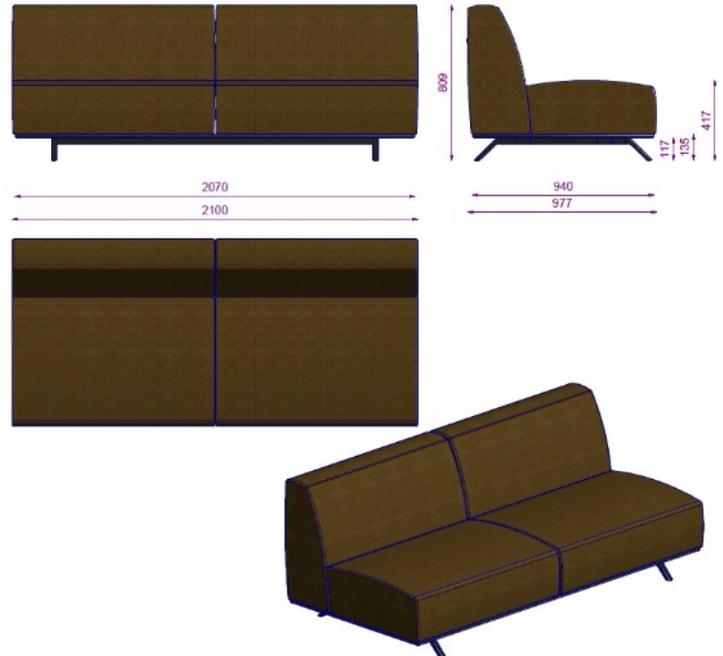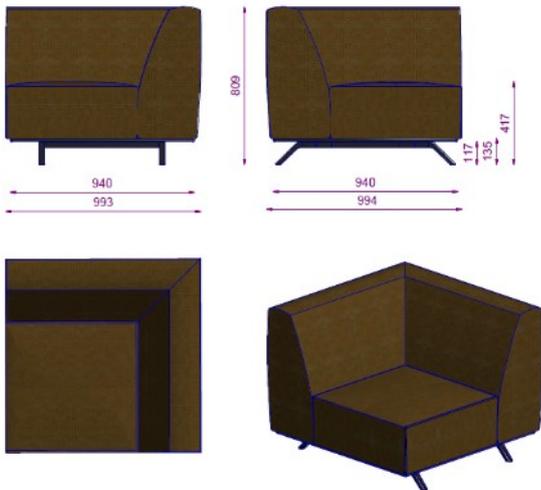

## Oscar S0 Oturma Grubu


OSCAR S0 99 KÖŞE KOLTUK w:994 d:994 h:807 mm

OSCAR S0 210 ARA KANEPE w:2100 d:977 h:807mm

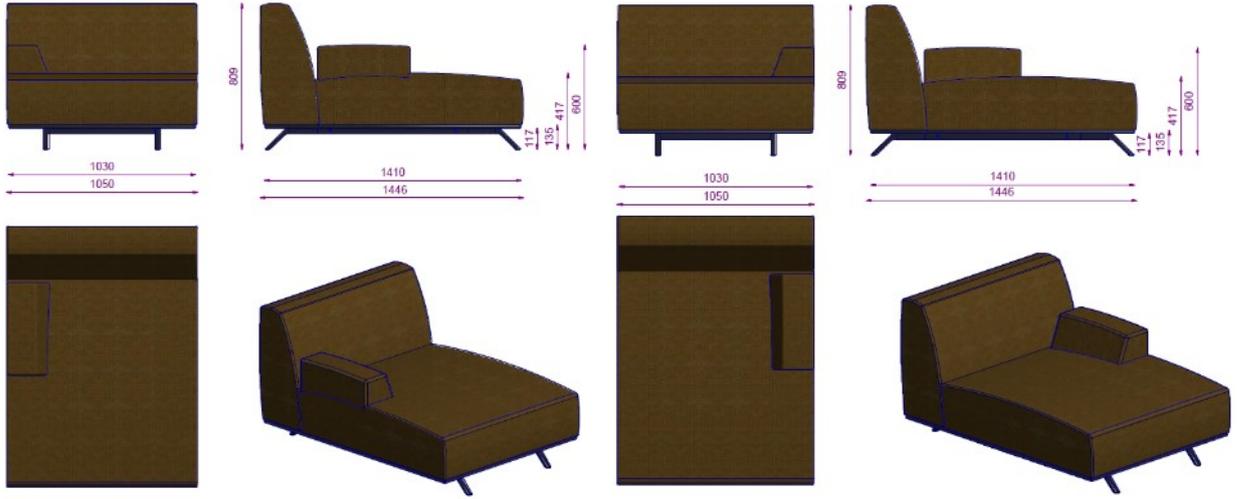


OSCAR S0 105 SOL UZAN KLTK w:1050 d:1446 h:807mm

OSCAR S0 105 SAĞ UZAN KLTK w:1050 d:1446 h:807mm

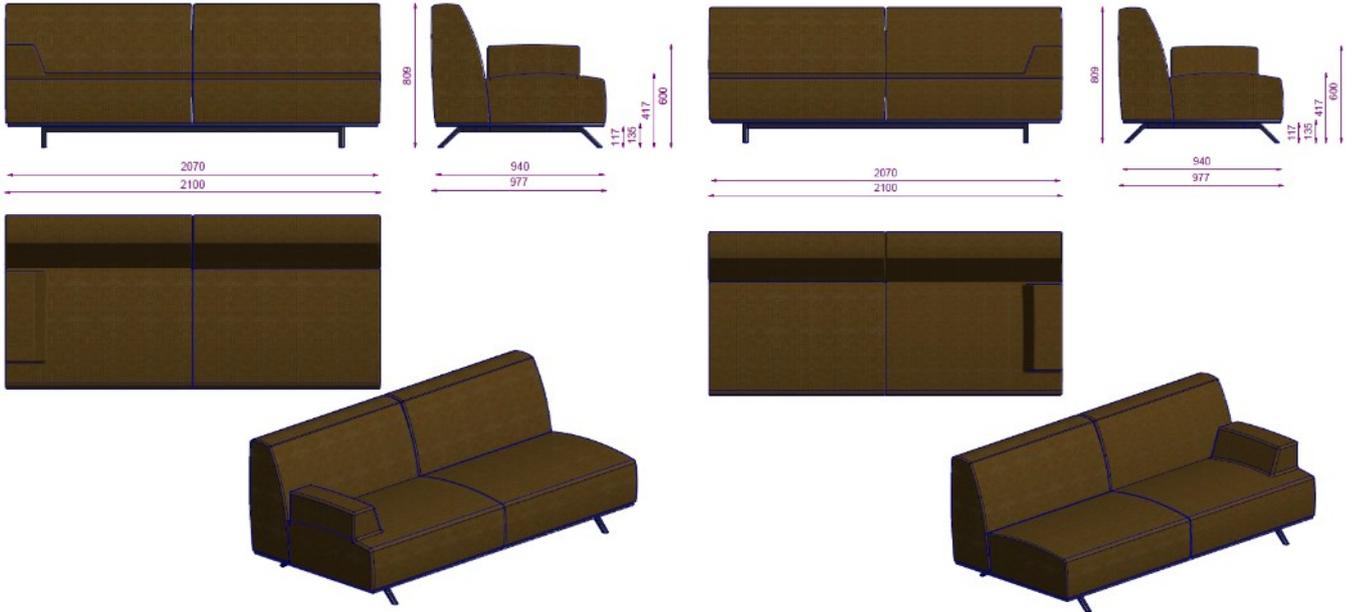

OSCAR S0 210 SOL KNP w:2100 d:977 h:807 mm

OSCAR S0 210 SAĞ KNP w:2100 d:977 h:807mm

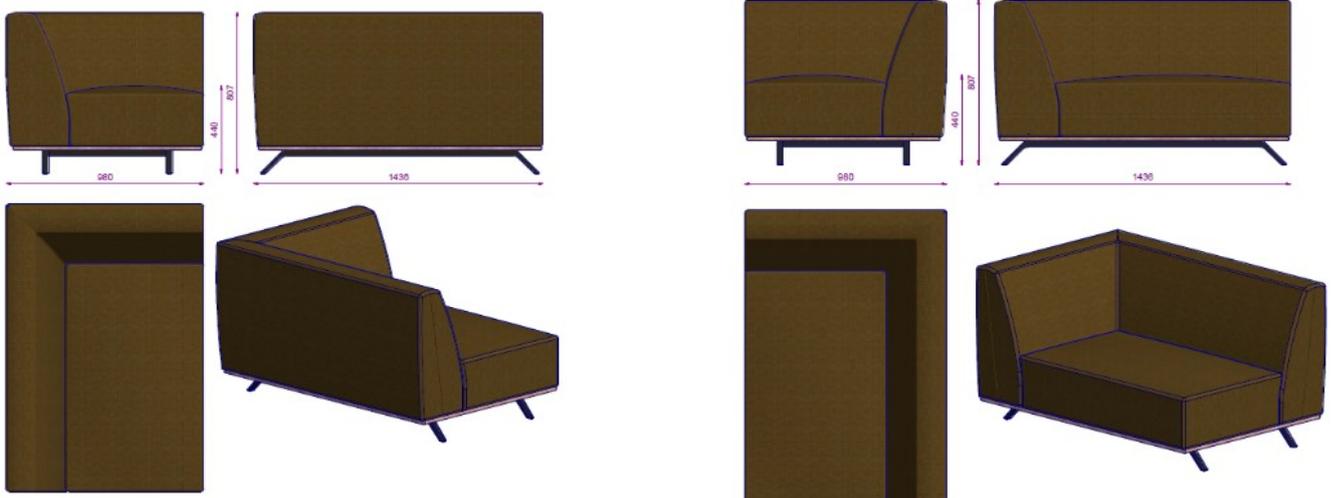

Oscar S0 Oturma Grubu

OSCAR S0 210 SOL KNP w:2100 d:977 h:807 mm

OSCAR S0 210 SAĞ KNP w:2100 d:977 h:807mm